



Wall-hung electric storage water heater



TITANIUM



ITALIAN
DESIGN



POLYURETHANE
INSULATION

- INNOVATIVE DESIGN
- HIGH PRECISION NTC TEMPERATURE SENSORS
- EASY AND FAST RESET
- 5 BOLTS FLANGE
- THICK THERMAL INSULATION
- OVERSIZE MAGNESIUM ANODE
- HIGH EFFICIENCY EXPANDED POLYURETHANE INSULATION
- PRESSURE SAFETY VALVE TESTED AT 8 BAR
- PRODUCT TESTED TO THE HIGHEST QUALITY STANDARDS
- TITANIUM GLASSLINED INNER TANK TESTED AT 16 BAR
- MAXIMUM COMFORT


maximum
performance

Technical data - Overall dimensions

		SHAPE ECO									SHAPE ECO							
		50 V 1,8K	65 V 1,8K	80 V 1,8K	100 V 1,8K	50 H 1,8K	65 H 1,8K	80 H 1,8K	100H 1,8K		50V	65V	80V	100V	50H	65H	80H	100H
Capacity	l	50	65	80	100	50	65	80	100	a mm	570	686	775	927	570	686	775	927
Installation	V	V	V	V	V	H	H	H	H		mm							
TD/TS	-	-	-	-	-	-	-	-	-	b mm	379	501	584	736	164	248	331	483
Size	Regular	Regular	Regular	Regular	Regular	Regular	Regular	Regular	Regular		mm							
Power	kW	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	c mm	191	185	191	191	172	186	191	191
Voltage	V	230	230	230	230	230	230	230	230		mm							
Heating time (ΔT=45°C)	h,min	1:32'	1:59'	2:27'	3:03'	1:32'	1:59'	2:27'	3:03'									
Heat dispersion at 65°C	kWh/24h	0,8	0,87	0,94	1,08	0,85	1	1,14	1,25									
Max working pressure	bar	8	8	8	8	8	8	8	8									
Max working temperature	°C	80	80	80	80	80	80	80	80									
Weight	kg	19	21	23,5	27	19	21	23,5	27									
Class	IP	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4									

SHP ECO 50 V 1,8K	SHP ECO 65 V 1,8K	SHP ECO 80 V 1,8K	SHP ECO 100 V 1,8K	SHP ECO 50 H 1,8K	SHP ECO 65 H 1,8K	SHP ECO 80 H 1,8K	SHP ECO 100 H 1,8K
* 3605141	3605142	3605143	3605144	3605145	3605146	3605147	3605148

* With Plug and Cable (PL)

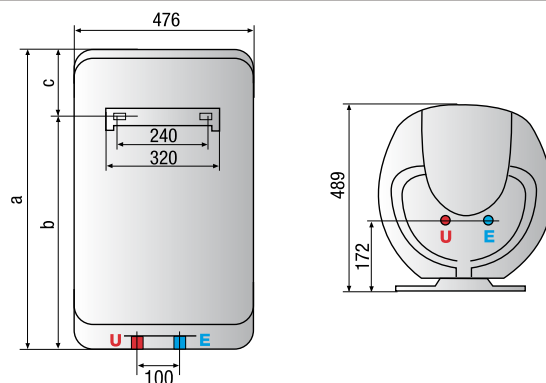

LEGEND

- E** Cold water inlet G 1/2"
- U** Hot water outlet G 1/2"